



NARMADA CONTROL AUTHORITY, REGIONAL OFFICE HYDROLOGY DIRECTORATE, INDORE




Daily Status of Narmada River Basin at 08:00 hrs. on 19 August, 2022

| S. No | Name of Station | FRL/Danger level Meter | Water Level Metre | Live Storage as on today MCM | % w.r.to Live Storage at % | Inflow/ # Discharge Cumec | Average Outflows during last 24 hrs. | | | | | RAINFALL | | Rainfall in other sites during the last 24 hours in mm | |
|-------|---------------------|---------------------------|----------------------|---------------------------------|-------------------------------|------------------------------|--------------------------------------|---------|-------|--------------------|---------------------|--------------|---------------------|--|------|
| | | | | | | | Spillway Cumec | PH Rel. | | HR Rel. Cumec | Total Rel. Cumec | 24 Hrs mm | 2 fr. 15 June mm | | |
| | | | | | | | | RBPH | CHPH | | | | | | |
| 1 | Bargi Reservoir | 422.76 | 421.10 | 2758 | 87% | 1204 | 2745.1 | 188.9 | 22.2 | 25.0 | 2981.2 | - | 458.4 | Molgi | 20.0 |
| 2 | Burmanghat | 322.00 | 317.75 | - | | 4354 | | | | | | - | 766.2 | Situ | 6.8 |
| 3 | Tawa Reservoir | 355.40 | 353.90 | 1652 | 85% | 402 | - | - | 53.8 | 0.4 | 54.2 | - | 1711.0 | | |
| 4 | Hoshangabad | 293.83 | 289.40 | - | | 5133 | | | | | | - | 1082.2 | | |
| 5 | ISP Reservoir | 262.13 | 260.66 | 8116 | 87% | 8787 | 11313.5 | 1840.0 | - | - | 13153.5 | - | 708.6 | | |
| 6 | OSP Reservoir | 196.60 | 195.48 | 138 | 61% | 11819 | 10954.6 | 491.0 | - | - | 11445.6 | - | 706.0 | | |
| 7 | Maheshwar Reservoir | 162.76 | 149.10 | - | | - | | | | | | - | 472.8 | | |
| 8 | SSP Reservoir | 138.68 | 135.46 | 4754 | 83% | 16314 | 13981.5 | 1272.0 | 514.0 | 519.8 [§] | 15767.5 | 4.6 | 1152.2 | | |

Power Generation from Sardar Sarovar Project 32.812 MUs

Average discharge measured at (i) Godbole Weir 17.44 (24:00 hrs) Cumec Garudeshwar Weir 17206 Cumec
(ii) Gujarat-Rajasthan Borde 15.01 Cumec measured on 18.08.2022 Ex-MP Releases 11446 Cumec
989 MCM

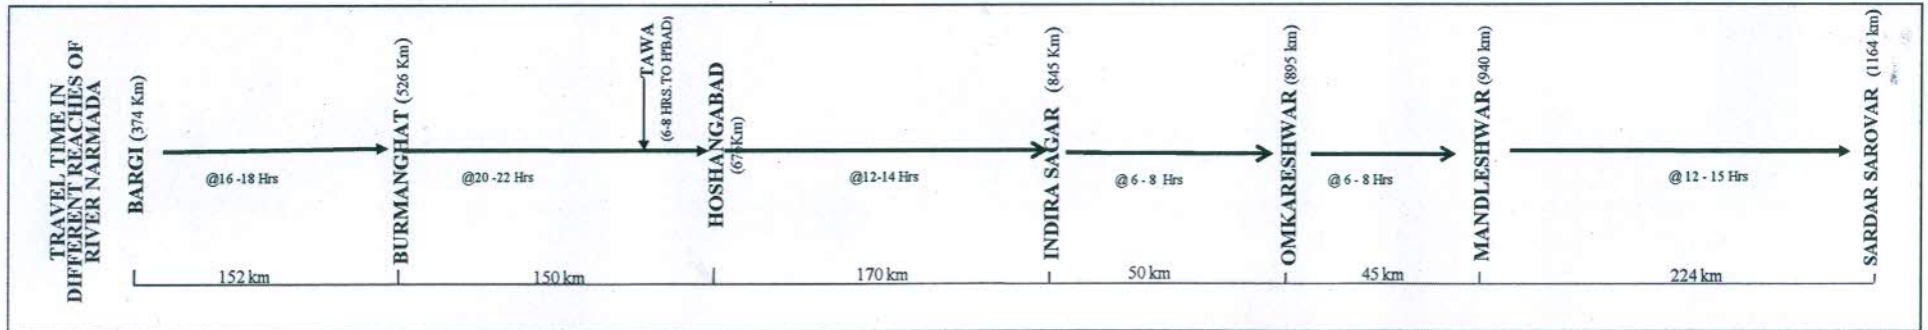

Note: # -The above information on inflow is indicative and on the basis of data provided by project Authorities. Evaporation in all the reservoirs needs to be included in water balancing.
Water level, Discharge (at G&D site) & Live Storage are at 08:00 hrs on the day. Inflow (into reservoir), Spillway, PH & HR releases are 24 hours average of preceding day.
§ -Water released through CHPH/IBPT is diverted to HR of NMC & Godbole gate for env. use.

Copy with Compliment to :-

- NCA : Executive Member, Member(Civil/Power/E&R), Chief Engineer, Director (Civil), Director (IA&R), SE (EMC), NCA, Indore.
- GoMP : Vice Chairman, NVDA, Member (Engg), NVDA, Bhopal
- GoG : Director (Civil), SSNNL, Gandhi Nagar, Chief Engineer (D&V), SSNNL, Vadodara, SE (Design), SSNNL, Vadodara
- GoM : Chief Engineer, Tapi Irrigation Development Corporation Ltd. Jalgaon.
- GoR : Chief Engineer, NMC, Sanchore

For
19/8/22

(R Parmar)
Assistant Director (HM)